



Rocking Mixer "Vibromatic"

DIGITAL ELECTRONIC CONTROL OF SPEED AND TIME.



Optimum shaking frequency: 950 oscillations per minute

APPLICATIONS

Dissolution, extractions and homogenisation.

FEATURES

Electronic control from 100 to 950 oscillations per minute. (1900 vibrations) and timer from 1 to 999 minutes or continuous operation.

Oscillation amplitude: 8 mm.

Easily detachable arms equipped with 8 clamps that allow all types of tubes and flask with diameters of between 5 to 50 mm can be held in position.

Maximum load: 4 kg.


CONTROL PANEL

1. Digital display indicator of osc./min. and time.
2. Parameter display selector.
3. Parameter selector, speed or time.
4. Push button increase value.
5. Push button decrease value.
6. Push button start-stop.



MODEL

Part No.	Oscillations p.m.	Maximum capacity Kg	Height / Width / Depth (exterior) cm	Power W	Weight Kg
7000384	100 - 950	4	23 77 27	34	11

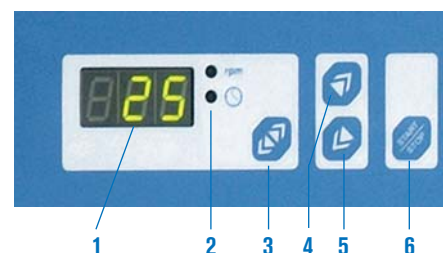

ACCESSORIES



Platform support for Erlenmeyer flasks, made from AISI 304 stainless steel with clip adapter position holes for 50 ml to 1000 ml flasks. Platform dimensions: 38 cm long x 19 cm wide.

Weight: 2 Kg.

Platform capacity:

- 18 Erlenmeyer flasks of 50 ml.
- 12 Erlenmeyer flasks of 100 ml.
- 8 Erlenmeyer flasks of 250 ml.
- 6 Erlenmeyer flasks of 500 ml.
- 3 Erlenmeyer flasks of 1000 ml.

Part No. **3001221**



Adapters for Erlenmeyer flasks.

Made from tempered stainless steel.

Part No.

1001003	Adapter for	50 ml.
1000978	Adapter for	100 ml.
1000979	Adapter for	250 ml.
1000980	Adapter for	500 ml.
1000981	Adapter for	1000 ml.

2 in 1. Platform support for Erlenmeyer flasks.



Model Vibromatic with adapter platform.